

The **Entra** compact SC-1D Access Node is a key component of the Entra unified cable access solution, a Distributed Access Architecture (DAA) that delivers significant performance gains, substantial savings on capital and operating expenses (CAPEX/OPEX), and enables an easy migration to an all-IP, all-fiber network. With a compact form factor, and configurable software to function as either a R-PHY or R-MACPHY device, the SC-1D Access Node provides cable operators maximum architectural flexibility.

The Entra SC-1D Access Node is an essential element of Entra's virtualized Distributed Access Architecture for cable networks. The compact Universal SC-1D Access Node performs cable-specific functions typically carried out in the Converged Cable Access Platform (CCAP). It is Flexible MAC Architecture (FMA) "Standards-Ready," and can be software configured as either a Remote-PHY device, handling RF modulation, or a Remote-MACPHY device, performing RF modulation and DOCSIS processing.

It enables operators to cost effectively add DOCSIS channels, splitting nodes and service groups. Cable operators can deliver services to all customers without adding equipment in congested hubs and headends.

The compact SC-1D Access Node supports full spectrum DOCSIS 3.1 and support for existing video services, making it ideal for high-capacity business and residential services. It features modular port configurations for 2 or 4 RF ports and is available with a variety of splits. The node also features a hot-swappable modular design for greater serviceability.


Housed in a compact, aluminum alloy die-cast enclosure, the SC-1D Access Node is designed to operate in harsh outdoor environments.



Entra SC-1D Access Node

Highlights

- Software-defined universal “R-PHY/R-MACPHY” access node. Flexible MAC Architecture (FMA) “standards-ready”
- Supports full spectrum DOCSIS 3.0 & 3.1
- Modular RF port configuration options (2- or 4-port) and up to two 10 GE SFP+ interfaces
- Supports 1 downstream and up to 2 upstream DOCSIS Service Groups/node
- Supports existing video services (broadcast, VoD, SDV, nPVR), Wideband Digital Forward to broadcast RF over IP, Up to 4 NDF/NDR/OOB/HMS, Optical Receiver (Video RF Overlay)
- Hot-swappable modular design; Field-replaceable components including amplifier modules, power supply unit and main processor module
- Compact, hardened OSP enclosure, line-powered with strand and pedestal mount options
- Flexible architecture allows operators to deploy vCMTS as best-suited per use case
- Increased fiber capacity and management enables higher service tiers including gigabit services
- Centrally managed and controlled by Entra Access Controller as part of the unified cable access solution
- Digital hub-to-node link dramatically improves signal-to-noise ratio (SNR) and carrier-to-noise ratio (CNR)
- Support for video services preserves legacy EQAMs and installed set-top box base
- Remote configuration and management increases operational agility
- Compact form factor and flexible mounting position fits in more space-restricted cabinets and environments

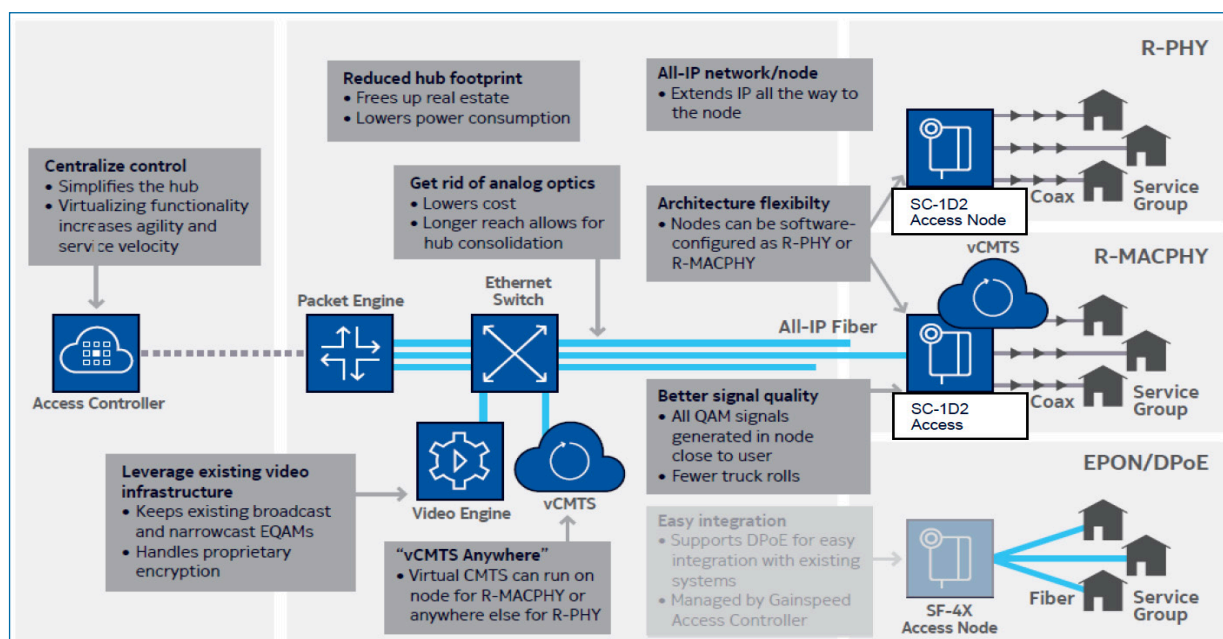

Technical specifications

Interfaces	Technology Equipment - Safety - Part 1: General Requirements); CAN/CSA C22.2 No. 60950-1-07, 2nd Edition, 2014-10-14 (Information Technology Equipment - Safety - Part 1: General Requirements); IEC 60950-1, Second Edition, 2013-05-01; EN 60950-1, 2013/10/01; CSA C22.2 No. 60950-22, Edition 1, 2011/12/01; UL 60950-22, Edition 1, 2011/12/19; IEC 60950-22, First Edition, 2005/10/01; EN 60950-22, 2008-01/01 CE, CB SchemelP Rating : IP-68 Rated
Up to 4 RF ports (75 ohm) 2 ports of 10 GE Service Groups & Ports : 2 forward x 2 reverse x 2 or 4 RF ports	
Supported SFP+ Optical Modules	
ER, LR, ZR, Bi-directional CWDM DWDM 10GPON*	
Physical Dimensions	
Height: 401 mm (15.8in) Width: 345mm (13.6in) Depth: 222mm (8.7in) Weight: 15kg (33lb)	
Operating Environment	
Temperature: -40°C to 60°C (-40°F to 140°F) Relative humidity: 5% to 95% non- condensing Altitude: -196 to 13,123 feet (-60 to 4,000 meters)	
Storage Environment	
Temperature: -40°C to 70°C (-40°F to 158°F) Relative humidity: 5% to 95% non-condensing Altitude: -196 to 13,123 feet (-60 to 4,000 meters)	
Power Requirement	
Consumption: 93W nominal with 2 ports, 117W nominal with 4 ports, 122W maximum Input frequency: 50Hz/60Hz Input voltage: 38 V to 90 VAC coax line power (quasi-squarewave)	
Mounting Options	
Aerial, pedestal Wall, pole, rack mount with accessory bracket Vertical or horizontal cooking	
Regulatory, industry and standards compliance	
Immunity	
EN 61000-4-2 Electrostatic Discharges EN 61000-4-3 Continuous Radiated Disturbances EN 61000-4-4 Electrical Fast Transients EN 61000-4-5 Surges EN 61000-4-6 Continuous Conducted Disturbances EN 61000-4-8 Power-frequency Magnetic Fields EN 61000-4-11 Voltage Dips and Interruptions IEEE C62.41/C62.45 Combination Wave Category B3 6kV / 3kA (Coax Ports) IEEE C62.41/C62.45 Ring Wave Category B3 6kV / 500A (Coax Ports) ITU-T K.45, K.44 Basic, Enhanced ANSI/SCTE 82 2012	
Safety	
Evaluated to IEC 60950-1:2014 (Second Edition), Am1:2009 + Am2 UL 60950-1, 2nd Edition, 2014-10-14 (Information	
	Outdoor Use Pollution Degree PD2 IEC 60950-22, First Edition, 2005/10/01; EN 60950-22, 2008-01/01 IP68 rated
	Emissions FCC 15.109(b), Compliant with Class B limits ICES-003 EN 55032 AS/NZS CISPR 32 VCCI-CISPR 32
	Surge ANSI/SCTE 81 2012 ITU-T K.45 Basic and Enhanced IEEE C62.41 Cat B, Combination 6kV/3kA; Ring wave 6kV/500A
	Industry Standards CableLabs CM-TR-R-MACPHY Remote MAC-PHY CableLabs CM-SP-FMA-D07 FMA System Specification CableLabs CM-SP-FMA-MMI-D03 FMA MAC Manager Interface CableLabs CM-SP-FMA-PAI-D04 FMA PacketCable Aggregator Interface CableLabs CM-SP-FMA-OSSI-D01 FMA OSSI Distributed CCAP Architecture (DCA) MHAv2 Specifications CableLabs CM-SP-R-PHY Remote PHY Specification CableLabs CM-SP-R-DEPI Remote Downstream External PHY Interface Specification CableLabs CM-SP-R-UEPI Remote Upstream External PHY Interface Specification CableLabs CM-SP-R-GCP Generic Control Plane Specification CableLabs CM-SP-R-DTI Remote DOCSIS Timing Interface Specification CableLabs CM-SP-R-OOB Remote Out-of-Band Specification CableLabs CM-SP-R-OSSI Remote PHY OSS Interface Specification CableLabs CM-SP-DRFI Downstream RF Interface Specification, Appendix D ANSI/SCTE 46 2007 ANSI/SCTE 91 2015 ANSI/SCTE 02 2006 ANSI/SCTE 149 2013 MSA SFF-8432 MSA SFF-8431 Level III or higher MSA SFF-8472

Technical specifications

Quality ISO 9001 TL 9000 ISO 14001 OHSAS 18001 ESD 20.20	Wideband digital forward Up to 43 6MHz/32 8MHz channels of broadcast band transport over IP. Typical broadcast modulations 8VSB, PAL, FM, NTSC CNR : 50 dB typical
Environmental RoHS Directive 2011/65/EC WEEE Directive 2012/95/EC	RF impedance 75 ohm
Reliability Designed for five 9s of availability (99.999%) Predicted MTBF > 449,196 hrs	Upstream Service Groups : Up to 2 Capacity : 2X12 D3.0 / 4 x 96 MHz D3.1 Channels : Up to 12 QAM; up to 2 OFDMA per Service Group
RF Specifications	Input Input Levels: 27 dBmV to 7 dBmV Isolation : > 65 dB Rejection : > 65 dB
RF Ports Up to 4 RF ports Operational bandwidth : 5 MHz to 1,218 MHz	Diagnostics Test Ports : -20 dB Low RF level alarm per port RF amplifier on/off controls per port RF input on/off controls per port Voltage and temperature monitoring
Splits 5 - 42 MHz / 54 - 1218 MHz 5 - 65 MHz / 85 - 1218 MHz 5 - 85 MHz / 102 - 1218 MHz 5 - 204 MHz / 258 - 1218 MHz	Optical Receiver Specifications
Downstream Service Groups : Up to 1 Capacity : 2 X 160 D3.0 / 12 x 192 MHz D3.1 Channels : Up to 158 QAM J.83 Annex A/B/C; up to 6 OFDM per Service Group Channel bandwidths: Up to 192 MHz OFDM	Optical Input 1260 - 1560 nm 2 to -6 dBm AGC Dynamic Range SC-APC
Output Total Composite Power : Up to 71 dBmV RF Output Level : 61 dBmV @ (virtual) Up to 24 dB pluggable tilt (s/w readable ID) MER : 46 dBmV typical CTN : > 60 dBc CIN : > 55 dBc	RF Output 50 to 800 MHz Flatness +/- 1 dB CSO : 60 dB CTB : 63 dB Isolation : > 50 dB
Out of band capabilities Up to 4 channels of OOB, SCTE 55-1, SCTE 55-2, SCTE 25-1 HMS Up to 160 CW pilot tones Up to 2 leakage detection tags per Service Group Viavi PathTrak support	